

N838 FIJI

ATHLEISURE WITH ATTITUDE

APPLICATIONS & TECHNICAL DATA



LIGHT LOOSE
TOPWEAR



SECOND-SKIN
SHIRTS



TECHSTYLE
T-SHIRT

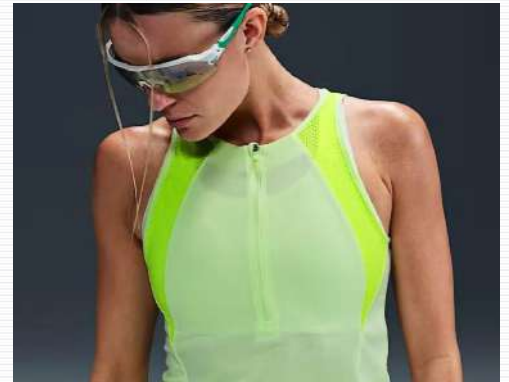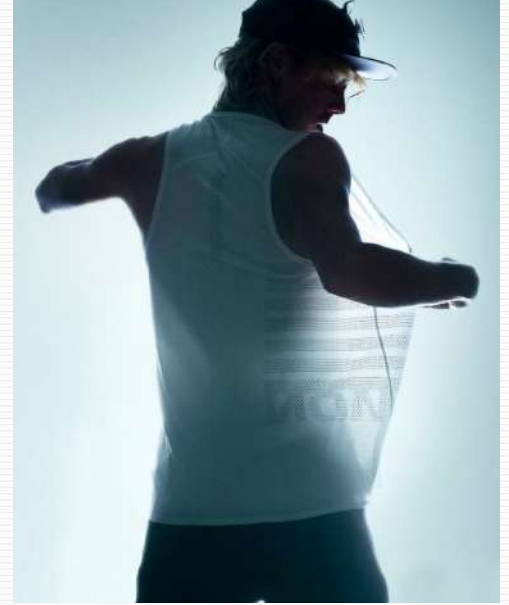

PROVISIONAL

COMPOSITION

(ASTM STANDARD ±3% TOLERANCE)

86%

RECYCLED
NYLON

14%

ELASTANE
HIGH-CHLORINE RESISTANCE

WEIGHT

(±5% TOLERANCE)

120 G/M²

3.54 OZ/YD²

WIDTH

(+3% / -2% TOLERANCE)

148 CM

58.3 INCHES

COURSES

50 / CM

127 / INCHES

WALES

30 / CM

76 / INCHES

DIMENSIONAL CHANGE OF FABRIC AFTER HL
AATCC 135-2015 (1 WASH, NORMAL CYCLE AT 41
DEGREE CELSIUS LINE DRY)

MAX -4%
WIDTH

MAX -4%
LENGHT

RESISTANCE TO PILLING
ASTM D 3512-RANDOM TUMBLE AT 30 MINUTES
PHOTOGRAPHIC RATING STD

4.0 TO 4.5

ULTRAVIOLET PROTECTION FACTOR (U.P.F.)
AATCC 183-2010

50+

SOLID FABRIC

STRETCH TO DYNAMOMETER (±15%)
ASTM D4964 - LOAD 20 LBS

170%

WIDTH
(MIN 145% - MAX 196%)

80%

LENGTH
(MIN 68% - MAX 92%)

MODULUS @ % ELONGATION (30% - 50% - 70%)

30%	50%	70%	30%	50%	70%
0.0 - 0.2	0.2 - 0.4	0.4 - 0.7	0.4 - 1.0	1.3 - 2.5	4.3 - 7.8

CARE LABELLING SYMBOLS



12717 CORYDALIS BLUE



4718 COCOA POWDER



0919 NERO



0210 WHITE SOLID / 0120 WHITE PFP