




N812 MISTY

COMPOSITION (ASTM STANDARD ±3% TOLERANCE)		WEIGHT (±5% TOLERANCE)	WIDTH (+3% / -2% TOLERANCE)	COURSES		WALES	
84% RECYCLED POLYAMIDE	16% ELASTANE HIGH-CHLORINE RESISTANCE	125 G/M ²	140 CM	44 / CM	30 / CM		
		3.7 OZ/YD ²	55 INCHES	112 / INCHES	76 / INCHES		
DIMENSIONAL CHANGE OF FABRIC AFTER HL AATCC 135-2015 (1 WASH, NORMAL CYCLE AT 41 DEGREE CELSIUS LINE DRY)		RESISTANCE TO PILLING ASTM D 3512-RANDOM TUMBLE AT 30 MINUTES PHOTOGRAPHIC RATING STD			ULTRAVIOLET PROTECTION FACTOR (U.P.F.) AATCC 183-2010		
MAX -5% WIDTH	MAX -5% LENGTH	4.0 TO 4.5			40 TO 50+		
STRETCH TO DYNAMOMETER (±15%) ASTM D4964 - LOAD 20 LBS		230% WIDTH (MIN 196% - MAX 265%)			80% LENGTH (MIN 68% - MAX 92%)		
		30%	50%	70%	30%	50%	70%
MODULUS @ % ELONGATION (30% - 50% - 70%)		0.0	0.1 - 0.3	0.3 - 0.6	0.5 - 1.5	1.8 - 3.6	8.0 - 15.0
CARE LABELLING SYMBOLS							

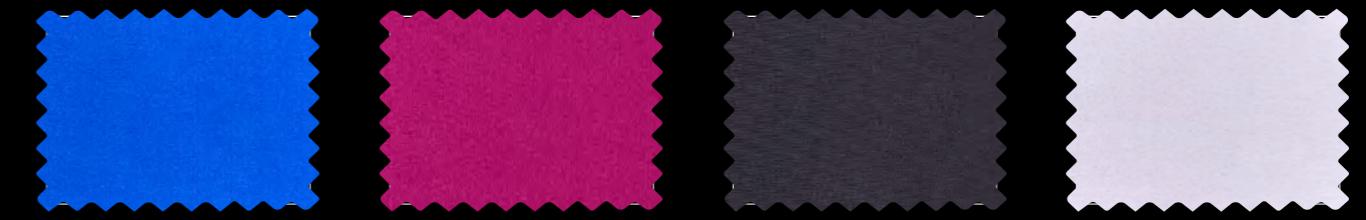

• 5316 NEW BLU CINA 0614 AMARANTA 0919 NERO 0210 WHITE / 0120 PFP

AATCC STANDARDS

COLOUR	CHLORINATED WATER AATCC 162	LIGHT AATCC 16-20 AFU					WATER 38°C AATCC 107					SEA WATER 38°C AATCC 106					PERSPIRATION AATCC 15					CROCKING AATCC 8		WASHING 49°C AATCC 61-2A								
	C.C.	C.C.	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	S.CO DRY	S.CO WET	C.C.	AC	CO	PA	PL	PC	WO
0210 / 0120	3	3	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	4.5	5	5	5	5	5	5	5	4.5	5	5	5	5	5	5		
0614	4	4.5	4.5	4	3.5	3.5	4	4	3.5	4.5	4	3.5	3.5	4	4	3.5	4.5	4.5	4.5	4	4.5	4.5	4.5	4.5	3	4.5	4	4	3	3.5	4.5	4
5316 ●	3	3.5	4.5	3.5	3	2.5	3	3	2.5	4.5	3.5	3	2.5	3	3	2.5	4.5	4	3.5	3	3.5	3.5	3	4.5	3.5	4	4.5	3.5	3	4.5	4.5	3.5
0919	4.5	4.5	4.5	4	3.5	3.5	4	4	3.5	4.5	4	4	3.5	4	4	3.5	4.5	4.5	4.5	4.5	4.5	4.5	4	3	4.5	4.5	4	4	4.5	4.5	4	

ISO STANDARDS

COLOUR	CHLORINATED WATER ISO 105-E03	LIGHT ISO 105-B02					WATER ISO 105-E01					SEA WATER ISO 105-E02					ALKALINE PERSPIRATION PH 8.0 ISO 105-E04					CROCKING ISO 105-X12		WASHING 40°C ISO 105-C06 A25					
	C.C.	C.C.	C.C.	CO	PA	PL	C.C.	CO	PA	PL	C.C.	CO	PA	PL	C.C.	CO	PA	PL	S.CO DRY	S.CO WET	C.C.	CO	PA	PL	PC	WO			
		50 MG/L	C.C.	C.C.	CO	PA																							
0210 / 0120	2-3	3	4-5	5	5	5	4-5	5	5	5	4-5	5	5	5	4-5	5	5	5	5	5	5	5	4-5	5	5	5	5	5	5
0614	4	4-5	4-5	4-5	4	4-5	4-5	4	4-5	4	4-5	4	4-5	4	4-5	4	4-5	4	4-5	4	4-5	4	4-5	4	3	4-5	4	3-4	4
5316 ●	2-3	3-4	4-5	3-4	3	3-4	4-5	3-4	3	3-4	4-5	3-4	3-4	3	3-4	4-5	3-4	3-4	3-4	3-4	3-4	3-4	3-4	3-4	4-5	4-5	4-5	3-4	4-5
0919	4-5	4-5	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4	4-5	4	3	4-5	4-5	4	4-5

AVAILABLE COLORS THE 4 COLORS PRESENTED IN THIS PAGE ARE ALWAYS AVAILABLE FOR SAMPLING. IF YOU WOULD LIKE TO CHOOSE A COLOR FROM THE MAIN POLYAMIDE COLOR CARD, YOU CAN ENJOY A MCQ OF 70 MTS FOR BULK ORDERS. HOWEVER, THE RESULTING COLOR SHADE AND THE COLOR FASTNESS PERFORMANCES MAY BE SLIGHTLY DIFFERENT. WE WILL SUBMIT TO YOUR ATTENTION A LAB DIP SWATCH FOR APPROVAL BEFORE GOING ON WITH THE BULK PRODUCTION.

SPECIAL NOTES/WARNINGS WE RECOMMEND CARRYING OUT LAB TESTS FOR COLOR MATCHES, MOLDING, BONDING AND APPLICATIONS ON FABRICS IN ORDER TO PREVENT PROBLEMS FROM ARISING DURING GARMENTS PRODUCTION. PLEASE CAREFULLY CHECK PHYSICAL DATA AND COLOR FASTNESS FORECASTS.