

 *Shiny*


N330 SHIRA MOTION




2319 nero



9917 dark olive

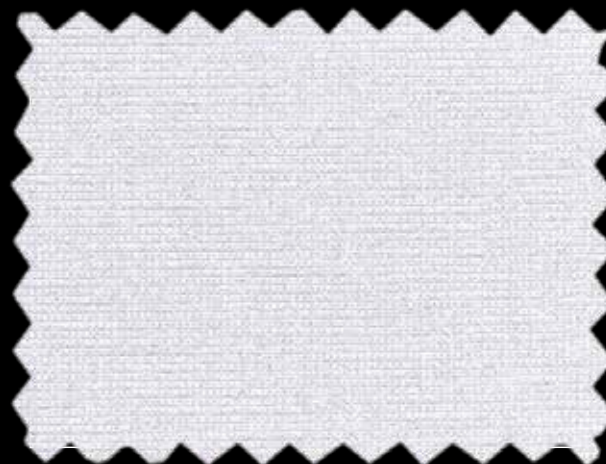

1410 white - 1910 white PFP

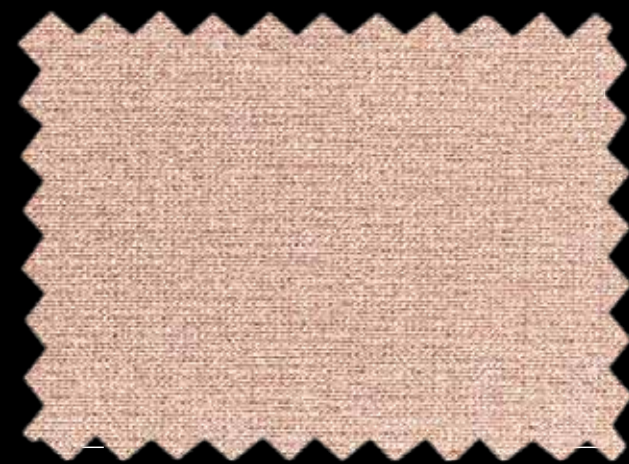

2518 champagne

N330 SHIRA MOTION

Applications

> Swimwear > Sportswear > Dancewear

This fabric has the exclusive feature of combining style and flexibility. Due to its heavier weight, this fabric can ensure the best fit and comfort, good elasticity and vibrant shininess, for unique activewear and heavy swimwear garments. It's ideal to combine fashion, performance and comfort.



Composition

Polyamide		Elastane					
80%		20%					
Weight (±5%)		Width (+3%/-2%)					
220 g/m²	330 g/m lin.	150 cm					
Courses	Wales	Tolerance for composition (standard ASTM)					
46/cm	26/cm	±3%					
Dimensional Change of fabric after HL AATCC 135-2015 (1 wash, normal cycle at 41 degree Celsius line dry)		Max	Max				
		-5%	-5%				
		Width	Length				
Resistance to pilling ASTM D 3512-Random tumble at 30 minutes photographic rating STD		4 to 4.5					
Ultraviolet Protection Factor (U.P.F.) AATCC 183-2010		50+					
Stretch to dynamometer (+15%) ASTM D 4964 - LOAD 20 LBS		105%	155%				
		Width	Length				
Modulus % elongation (30% - 50% - 70%)		(min 89% - max 121%)					
		30%	50%	70%	30%	50%	70%
		0.4-0.9	1.1-2.1	2.5-4.5	0.2-0.6	0.9-1.7	1.7-3.0
Care labelling codes							

AATCC Standards


COLOUR	CHLORINATED WATER AATCC 162	LIGHT AATCC 16-20 AFU	WATER 38°C AATCC 107							SEA WATER 38°C AATCC 106							PERSPIRATION AATCC 15							CROCKING AATCC 8		WASHING 49°C AATCC 61-2A							
	C.C.	C.C.	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	C.C.	AC	CO	PA	PL	PC	WO	S.CO DRY	S.CO WET	C.C.	AC	CO	PA	PL	PC	WO	
1410-1910	3.5	3	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	
1910	3.5	3	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	5	5	4.5	5	5	5	5	5	5	
9917	4	4.5	4.5	4.5	4.5	4	4.5	4.5	4	4.5	4.5	4.5	4	4.5	4.5	4	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	3.5	4.5	4.5	4.5	3.5	4.5	4.5	4
2518	4	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
2319	4.5	4.5	4.5	4	4	4	4.5	4.5	4	4.5	4	4	4	4.5	4.5	4	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4	3	4.5	4.5	4	4	4.5	4.5	4	

ISO Standards

COLOUR	CHLORINATED WATER ISO 105-E03	LIGHT ISO 105-B02	WATER ISO 105-E01			SEA WATER ISO 105-E02			ALKALINE PERSPIRATION PH 8.0 ISO 105-E04			ACID PERSPIRATION PH 5.5 ISO 105-E04			CROCKING ISO 105-X12		WASHING 40°C ISO 105-C06 A2S		
	C.C.	C.C.	C.C.	CO	PA	C.C.	CO	PA	C.C.	CO	PA	C.C.	CO	PA	S.CO DRY	S.CO WET	C.C.	CO	PA
	50 mg/l																		
1410-1910	2-3	3	4-5	5	5	4-5	5	5	4-5	5	5	4-5	5	5	5	5	4-5	5	5
1910	2-3	3	4-5	5	5	4-5	5	5	4-5	5	5	4-5	5	5	5	5	4-5	5	5
9917	3	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	3-4	4-5	4-5	4
2518	3-4	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5	4-5
2319	4	4-5	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4-5	4-5	4	4	3	4-5	4-5	4

Available colors: the 4 colors presented in this page are always available for sampling. If you would like to choose a color from the main Shiny color card, you can enjoy a MCQ of only 70 mts for bulk orders. However, the resulting color shade and the color fastness performance may be slightly different. We will submit to your attention a lab dip swatch for approval before going on with the bulk production.

Special notes/warnings: we recommend carrying out lab tests for color matches, molding, bonding and applications on fabrics in order to prevent problems from arising during garments production. Please carefully check physical data and color fastness forecasts.

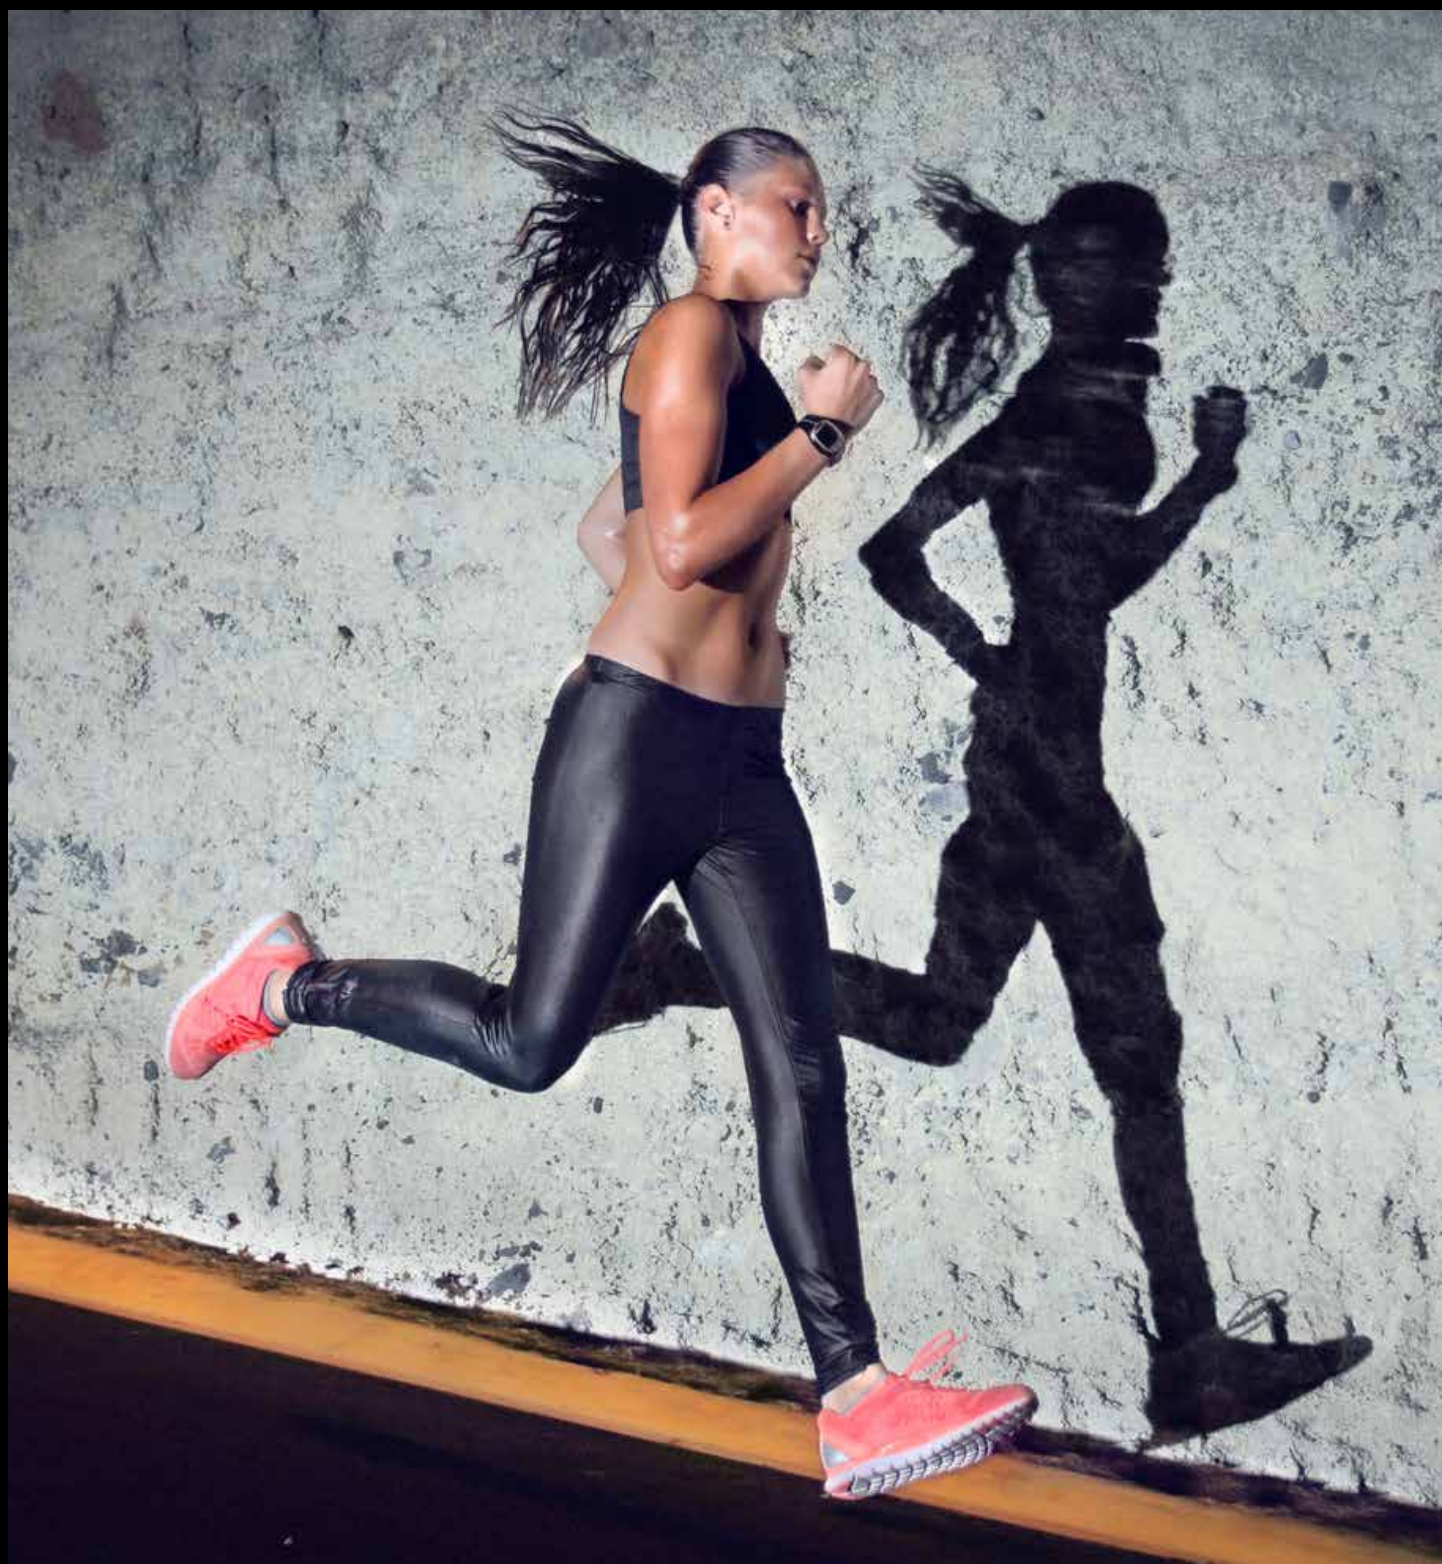

N330 SHIRA MOTION



shiny



high
chlorine
resistance



UV
protection



shape
retention



two way
stretch



comfort
fit



printable